

INSTRUCTIONS FOR USE

IMPORTANT - Read the following instructions prior to using your new EZ Slate Chalkboard. Ghent recommends using pure, white, dustless chalk with a very low binder content. Soft chalk works best and preserves the performance of your EZ Slate surface. EZ Slate does not require that the surface be "chalked in". Simply write and erase on a clean surface.

CLEANING INSTRUCTIONS

Experience and testing have proven that dry cleaning is the best and easiest method for cleaning all types of chalkboards. Simply erase the entire surface with a clean felt eraser and then wipe with a soft, lint-free cloth or dry chamois.

WASHING INSTRUCTIONS


To remove foreign matter such as stains, hair oil, fingerprints, crayon, pencil marks, etc., it may be desirable to wash the board with water. A mild household cleaner may be used on stubborn stains. Avoid the use of strong cleaners containing oil, soda, kerosene, or harsh abrasives. Be sure to dry the chalkboard immediately so that the chalk dust will not dry on the surface, producing a gray film or smeary condition. Water itself will not harm the chalkboard. However, the combination of water and chalk residue on the surface can create problems. When the chalkboard is washed, the water combines with chalk binder particles to form a substance that produces a white film or glaze on the surface. This may result in a slick glossy surface unfit for writing. This condition can develop on any type of chalkboard from any manufacturer, as it is the result of the combination of chalk binder particles and water. It is not related to the type of surface. Because sufficient thoroughness may not be exercised, and because it is time consuming, wet cleaning should be performed only when absolutely necessary. For best results, dry clean your chalkboard.

EZ SLATE CHALKBOARD INSTRUCTION SHEET

GHENT
MANUFACTURING, INC
ISEZSLATE

Series 1/4" EZ SLATE

ALUMINUM FRAMED EZ-SLATE CHALKBOARD

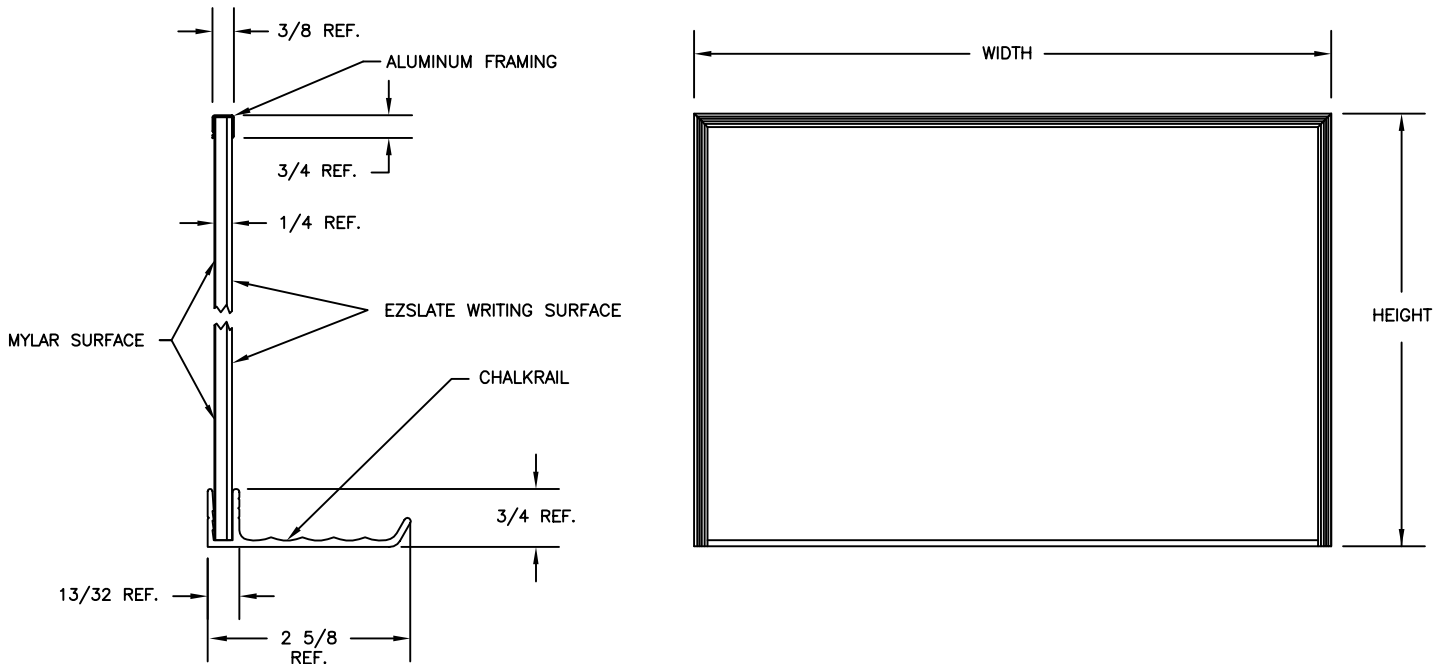

Specifications

All exposed metal shall be anodized extruded aluminum 6063-T5. Framing to be permanently attached to writing surface. The EZ slate chalkboard skins are laminated to 3/16" hardboard, with a mylar backing. EZ slate is available in green, black and gray, and is backed by a 20 year guarantee. Available in sizes from 3'H x 4'W through 4'H x 12'W.